

Microsoft Windows Embedded Compact Cryptographic Primitives Library (bcrypt.dll) Security Policy Document

*Microsoft Windows Embedded Compact 7 Operating System
FIPS 140-2 Security Policy Document*

This document specifies the security policy for the Microsoft Windows Cryptographic Primitives Library (BCRYPT.DLL) as described in FIPS PUB 140-2.

July 18, 2013

Document Version: 1.6

Microsoft Windows Cryptographic Primitives Library (bcrypt.dll) Security Policy Document

The information contained in this document represents the current view of Microsoft Corporation on the issues discussed as of the date of publication. Because Microsoft must respond to changing market conditions, it should not be interpreted to be a commitment on the part of Microsoft, and Microsoft cannot guarantee the accuracy of any information presented after the date of publication.

This document is for informational purposes only. MICROSOFT MAKES NO WARRANTIES, EXPRESS OR IMPLIED, AS TO THE INFORMATION IN THIS DOCUMENT.

Complying with all applicable copyright laws is the responsibility of the user. This work is licensed under the Creative Commons Attribution-NonCommercial-NoDerivs License (which allows redistribution of the work). To view a copy of this license, visit <http://creativecommons.org/licenses/by-nc-nd/3.0/> or send a letter to Creative Commons, 559 Nathan Abbott Way, Stanford, California 94305, USA. Microsoft may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from Microsoft, the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property. The example companies, organizations, products, people and events depicted herein are fictitious. No association with any real company, organization, product, person or event is intended or should be inferred.

© 2012 Microsoft Corporation. All rights reserved.

Microsoft, Active Directory, Visual Basic, Visual Studio, Windows, the Windows logo, Windows NT, Windows Server, Windows Vista, and Windows Embedded Compact 7 are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. The names of actual companies and products mentioned herein may be the trademarks of their respective owners.

Contents

1 Cryptographic Module Specification	6
1.1 Cryptographic Boundary	6
2 Security Policy	6
3 Cryptographic Module Ports and Interfaces	8
3.1 Ports and Interfaces	8
3.1.1 Export Functions.....	8
3.1.2 Data Input and Output Interfaces	8
3.1.3 Control Input Interface.....	8
3.1.4 Status Output Interface	8
3.2 Cryptographic Bypass.....	8
4 Roles and Authentication	9
4.1 Roles	9
4.2 Maintenance Roles.....	9
4.3 Operator Authentication.....	9
5 Services.....	9
5.1 Algorithm Providers and Properties	9
5.1.1 BCryptOpenAlgorithmProvider	9
5.1.2 BCryptCloseAlgorithmProvider	9
5.1.3 BCryptSetProperty.....	9
5.1.4 BCryptGetProperty.....	10
5.1.5 BCryptFreeBuffer	10
5.2 Random Number Generation	10
5.2.1 BCryptGenRandom	10
5.3 Key and Key-Pair Generation	10
5.3.1 BCryptGenerateSymmetricKey	10
5.3.2 BCryptGenerateKeyPair	10
5.3.3 BCryptFinalizeKeyPair	10
5.3.4 BCryptDuplicateKey.....	11
5.3.5 BCryptDestroyKey	11
5.4 Key Entry and Output.....	11
5.4.1 BCryptImportKey.....	11
5.4.2 BCryptImportKeyPair	11
5.4.3 BCryptExportKey	12
5.5 Encryption and Decryption	12
5.5.1 BCryptEncrypt	12
5.5.2 BCryptDecrypt.....	13

5.6 Hashing and HMAC14

 5.6.1 BCryptCreateHash.....14

 5.6.2 BCryptHashData14

 5.6.3 BCryptDuplicateHash14

 5.6.4 BCryptFinishHash15

 5.6.5 BCryptDestroyHash.....15

5.7 Signing and Verification.....15

 5.7.1 BCryptSignHash.....15

 5.7.2 BCryptVerifySignature15

5.8 Secret Agreement and Key Derivation16

 5.8.1 BCryptSecretAgreement16

 5.8.2 BCryptDeriveKey.....16

 5.8.3 BCryptDestroySecret16

5.9 Configuration17

 These are not cryptographic functions. They are used to configure cryptographic providers on the system, and are provided for informational purposes. Please see <http://msdn.microsoft.com> for details.....17

6 Operational Environment18

7 Cryptographic Key Management18

 7.1 Cryptographic Keys, CSPs, and SRDIs18

 7.2 Access Control Policy19

 7.3 Key Material.....20

 7.4 Key Generation20

 7.5 Key Establishment.....20

 7.6 Key Entry and Output.....20

 7.7 Key Storage20

 7.8 Key Archival.....20

 7.9 Key Zeroization.....20

8 Self-Tests20

9 Design Assurance21

10 Additional details21

1 Cryptographic Module Specification

The Microsoft Windows Cryptographic Primitives Library is a general purpose, software-based, cryptographic module. The primitive provider functionality is offered through one cryptographic module, BCRYPT.DLL (version 7.00.1687), subject to FIPS-140-2 validation. BCRYPT.DLL provides cryptographic services, through its documented interfaces, to Windows Embedded Compact 7 components and applications running on Windows Embedded Compact 7.

The cryptographic module, BCRYPT.DLL, encapsulates several different cryptographic algorithms in an easy-to-use cryptographic module accessible via the Microsoft CNG (Cryptography, Next Generation) API. It can be dynamically linked into applications by software developers to permit the use of general-purpose FIPS 140-2 Level 1 compliant cryptography.

1.1 Cryptographic Boundary

The Windows Embedded Compact 7 BCRYPT.DLL consists of a dynamically-linked library (DLL). The cryptographic boundary for BCRYPT.DLL is defined as the enclosure of the computer system, on which BCRYPT.DLL is to be executed. The physical configuration of BCRYPT.DLL, as defined in FIPS-140-2, is multi-chip standalone.


2 Security Policy

BCRYPT.DLL operates under several rules that encapsulate its security policy.

- BCRYPT.DLL is supported on Windows Embedded Compact 7.
- Windows Embedded Compact 7 is an operating system supporting a “single user” mode where there is only one interactive user during a logon session.
- BCRYPT.DLL is only in its Approved mode of operation when Windows Embedded Compact 7 is booted normally, meaning Debug mode is disabled.
- All users assume either the User or Cryptographic Officer roles.
- BCRYPT.DLL provides no authentication of users. Roles are assumed implicitly. The authentication provided by the Windows Embedded Compact 7 operating system is not in the scope of the validation.
- All cryptographic services implemented within BCRYPT.DLL are available to the User and Cryptographic Officer roles.
- BCRYPT.DLL implements the following FIPS-140-2 Approved algorithms:
 - SHA-1, SHA-256, SHA-384, SHA-512 hash (Cert. #1773)
 - SHA-1, SHA-256, SHA-384, SHA-512 HMAC (Cert. #1364)
 - Triple-DES (2 key and 3 key) in ECB and CBC modes (Cert. # 1307). 2 key is restricted to legacy use per SP 800-131. Users of the BCrypt.dll should transition away from 2 key algorithms in favor of encryption algorithms.
 - AES-128, AES-192, AES-256 in ECB and CBC modes (Cert. # 2023)
 - RSA (RSASSA-PKCS1-v1_5) digital signatures (Cert. 1051)
 - FIPS 186-2 DSA (Cert. #645)
 - ECDSA with the following NIST curves: P-256, P-384, P-521 (Cert. #295).
 - SP 800-90 Deterministic Random Bit Generator (DRBG) with AES-CTR (Cert. #193)
- BCRYPT.DLL supports the following non-Approved algorithms allowed for use in FIPS mode:
 - Diffie-Hellman (DH) secret agreement (key agreement; key establishment methodology provides between 80 and 150 bits of encryption strength; non-compliant less than 80-bits of encryption strength)
 - RSA Key wrapping (key agreement; key establishment methodology provides between 80 and 150 bits of encryption strength. Keys can be entered by using the recipient’s public key, per Section 7.6)
 - ECDH with the following NIST curves: P-256, P-384, P-521 (key agreement; key establishment methodology provides between 128 and 256 bits of encryption strength)
 - FIPS SP800-56A (Section 5.8), X9.63, and X9.42 key derivation
 - FIPS IPsec IKE v1 key derivation as specified in FIPS 140-2 Implementation Guidance D.8

- FIPS SSLv3.1 and TLS v1.0 key derivation as specified in FIPS 140-2 Implementation Guidance D.8
 - Non-Approved RNG (NewGenRandom) – Used to seed the Approved random number generators
 - Dual-EC DRBG non-Approved implementation
- BCRYPT.DLL also supports the following non FIPS 140-2 approved algorithms, though these algorithms may not be used when operating the module in a FIPS compliant manner:
 - RC2, RC4, MD2, MD4, MD5¹.
 - DES in ECB, CBC, and CFB with 8-bit feedback

The following diagram illustrates the master components of the BCRYPT.DLL module

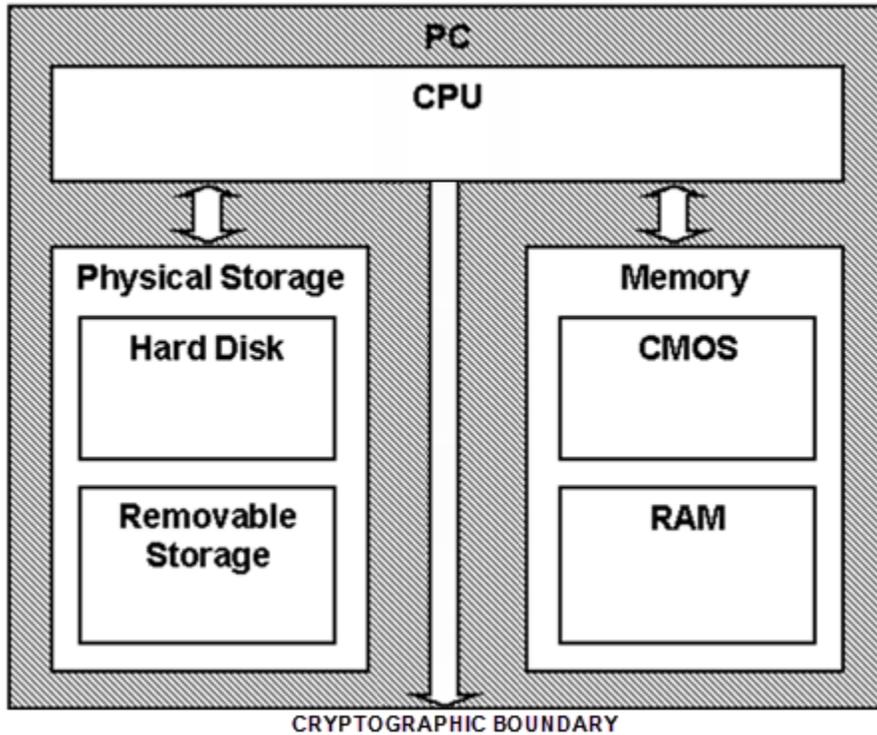

BCRYPT.DLL was tested using the following machine configurations:

ARMV5	Microsoft Windows Embedded Compact 7 – iMX27
ARMV6	Microsoft Windows Embedded Compact 7 – Samsung SMDK 6410
ARMV7	Microsoft Windows Embedded Compact 7 – TI OMAP EVM3530 EVM2 ARM Cortex A8 Processor
x86	Microsoft Windows Embedded Compact 7 – i586 (MSTI PDX-600)
MIPS	Microsoft Windows Embedded Compact 7 – Sigma Designs SMP8654 (MIPSII)
MIPS	Microsoft Windows Embedded Compact 7 – Sigma Designs SMP8654 (MIPSII_FP)

¹ Applications may not use any of these non-FIPS algorithms if they need to be FIPS compliant. To operate the module in a FIPS compliant manner, applications must only use FIPS-approved algorithms.

3 Cryptographic Module Ports and Interfaces

3.1 Ports and Interfaces

3.1.1 Export Functions

The following list contains the functions exported by BCRYPT.DLL to its callers.

- BCryptCloseAlgorithmProvider
- BCryptCreateHash
- BCryptDecrypt
- BCryptDeriveKey
- BCryptDestroyHash
- BCryptDestroyKey
- BCryptDestroySecret
- BCryptDuplicateHash
- BCryptDuplicateKey
- BCryptEncrypt
- BCryptExportKey
- BCryptFinalizeKeyPair
- BCryptFinishHash
- BCryptFreeBuffer
- BCryptGenerateKeyPair
- BCryptGenerateSymmetricKey
- BCryptGenRandom
- BCryptGetProperty
- BCryptHashData
- BCryptImportKey
- BCryptImportKeyPair
- BCryptOpenAlgorithmProvider
- BCryptSecretAgreement
- BCryptSetProperty
- BCryptSignHash
- BCryptVerifySignature

Additionally, BCRYPT.DLL exports crypto configuration functions. They are described in a separate section below for informational purposes.

3.1.2 Data Input and Output Interfaces

The Data Input Interface for BCRYPT.DLL consists of the BCRYPT export functions. Data and options are passed to the interface as input parameters to the BCRYPT export functions. Data Input is kept separate from Control Input by passing Data Input in separate parameters from Control Input.

The Data Output Interface for BCRYPT.DLL also consists of the BCRYPT export functions.

3.1.3 Control Input Interface

The Control Input Interface for BCRYPT.DLL also consists of the BCRYPT export functions. Options for control operations are passed as input parameters to the BCRYPT export functions.

3.1.4 Status Output Interface

The Status Output Interface for BCRYPT.DLL also consists of the BCRYPT export functions. For each function, the status information is returned to the caller as the return value from the function.

3.2 Cryptographic Bypass

Cryptographic bypass is not supported by BCRYPT.DLL.

4 Roles and Authentication

4.1 Roles

BCRYPT.DLL provides User and Cryptographic Officer roles (as defined in FIPS 140-2). These roles share all the services implemented in the cryptographic module.

When an application requests the crypto module to generate keys for a user, the keys are generated, used, and deleted as requested by applications. There are no implicit keys associated with a user. Each user may have numerous keys, and each user's keys are separate from other users' keys.

4.2 Maintenance Roles

Maintenance roles are not supported by BCRYPT.DLL.

4.3 Operator Authentication

The module does not provide authentication. Roles are implicitly assumed based on the services that are executed.

5 Services

The following list contains all services available to an operator. All services are accessible to both the User and Crypto Officer roles.

5.1 Algorithm Providers and Properties

5.1.1 BCryptOpenAlgorithmProvider

NTSTATUS WINAPI BCryptOpenAlgorithmProvider(BCRYPT_ALG_HANDLE *phAlgorithm, LPCWSTR pszAlgId, LPCWSTR pszImplementation, ULONG dwFlags);

The BCryptOpenAlgorithmProvider() function has four parameters: algorithm handle output to the opened algorithm provider, desired algorithm ID input, an optional specific provider name input, and optional flags. This function loads and initializes a CNG provider for a given algorithm, and returns a handle to the opened algorithm provider on success. See <http://msdn.microsoft.com> for CNG providers. Unless the calling function specifies the name of the provider, the default provider is used. The default provider is the first provider listed for a given algorithm. The calling function must pass the BCRYPT_ALG_HANDLE_HMAC_FLAG flag in order to use an HMAC function with a hash algorithm.

5.1.2 BCryptCloseAlgorithmProvider

NTSTATUS WINAPI BCryptCloseAlgorithmProvider(BCRYPT_ALG_HANDLE hAlgorithm, ULONG dwFlags);

This function closes an algorithm provider handle opened by a call to BCryptOpenAlgorithmProvider() function.

5.1.3 BCryptSetProperty

NTSTATUS WINAPI BCryptSetProperty(BCRYPT_HANDLE hObject, LPCWSTR pszProperty, PUCHAR pbInput, ULONG cbInput, ULONG dwFlags);

The BCryptSetProperty() function sets the value of a named property for a CNG object, e.g., a cryptographic key. The CNG object is referenced by a handle, the property name is a NULL terminated string, and the value of the property is a length-specified byte string.

User can pass BCRYPT_INTERNAL_AESCTR_RNG_SELF_TEST to pass pbInput (as pbEntropy) to AesCtrRng_Initialize. However, BCryptSetProperty does not support pbPersonalizationString.

5.1.4 BCryptGetProperty

NTSTATUS WINAPI BCryptGetProperty(BCRYPT_HANDLE hObject, LPCWSTR pszProperty, PCHAR pbOutput, ULONG cbOutput, ULONG *pcbResult, ULONG dwFlags);

The BCryptGetProperty() function retrieves the value of a named property for a CNG object, e.g., a cryptographic key. The CNG object is referenced by a handle, the property name is a NULL terminated string, and the value of the property is a length-specified byte string.

5.1.5 BCryptFreeBuffer

VOID WINAPI BCryptFreeBuffer(PVOID pvBuffer);

Some of the CNG functions allocate memory on caller's behalf. The BCryptFreeBuffer() function frees memory that was allocated by such a CNG function.

5.2 Random Number Generation

5.2.1 BCryptGenRandom

NTSTATUS WINAPI BCryptGenRandom(BCRYPT_ALG_HANDLE hAlgorithm, PCHAR pbBuffer, ULONG cbBuffer, ULONG dwFlags);

The BCryptGenRandom() function fills a buffer with random bytes. There are three random number generation algorithms:

- BCRYPT_RNG_ALGORITHM. The random-number generator algorithm based on the AES counter mode specified in the NIST SP 800-90 standard.
- BCRYPT_RNG_FIPS186_DSA_ALGORITHM. This is the random number generator algorithm suitable for DSA (Digital Signature Algorithm) as defined in FIPS 186-2.
- BCRYPT_RNG_DUAL_EC_ALGORITHM. This is the dual elliptic curve random-number generator algorithm specified in the NIST SP 800-90 standard.

When BCRYPT_RNG_USE_ENTROPY_IN_BUFFER is specified in the dwFlags parameter, this function will use the number in the pbBuffer buffer as additional entropy for the random number. If this flag is not specified, this function will use a random number for the entropy.

5.3 Key and Key-Pair Generation

5.3.1 BCryptGenerateSymmetricKey

NTSTATUS WINAPI BCryptGenerateSymmetricKey(BCRYPT_ALG_HANDLE hAlgorithm, BCRYPT_KEY_HANDLE *phKey, PCHAR pbKeyObject, ULONG cbKeyObject, PCHAR pbSecret, ULONG cbSecret, ULONG dwFlags);

The BCryptGenerateSymmetricKey() function generates a symmetric key object for use with a symmetric encryption algorithm from a supplied cbSecret bytes long key value provided in the pbSecret memory location. The calling application must specify a handle to the algorithm provider opened with the BCryptOpenAlgorithmProvider() function. The algorithm specified when the provider was opened must support symmetric key encryption.

5.3.2 BCryptGenerateKeyPair

NTSTATUS WINAPI BCryptGenerateKeyPair(BCRYPT_ALG_HANDLE hAlgorithm, BCRYPT_KEY_HANDLE *phKey, ULONG dwLength, ULONG dwFlags);

The BCryptGenerateKeyPair() function creates a public/private key pair object without any cryptographic keys in it. After creating such an empty key pair object using this function, call the BCryptSetProperty() function to set its properties. The key pair can be used only after BCryptFinalizeKeyPair() function is called.

5.3.3 BCryptFinalizeKeyPair

NTSTATUS WINAPI BCryptFinalizeKeyPair(BCRYPT_KEY_HANDLE hKey, ULONG dwFlags);

The `BCryptFinalizeKeyPair()` function completes a public/private key pair import or generation. The key pair cannot be used until this function has been called. After this function has been called, the `BCryptSetProperty()` function can no longer be used for this key pair.

5.3.4 BCryptDuplicateKey

```
NTSTATUS WINAPI BCryptDuplicateKey( BCRYPT_KEY_HANDLE hKey, BCRYPT_KEY_HANDLE *phNewKey, PCHAR
pbKeyObject, ULONG cbKeyObject, ULONG dwFlags);
```

The `BCryptDuplicateKey()` function creates a duplicate of a symmetric key object.

5.3.5 BCryptDestroyKey

```
NTSTATUS WINAPI BCryptDestroyKey( BCRYPT_KEY_HANDLE hKey);
```

The `BCryptDestroyKey()` function destroys a key.

5.4 Key Entry and Output

5.4.1 BCryptImportKey

```
NTSTATUS WINAPI BCryptImportKey( BCRYPT_ALG_HANDLE hAlgorithm, BCRYPT_KEY_HANDLE hImportKey, LPCWSTR
pszBlobType, BCRYPT_KEY_HANDLE *phKey, PCHAR pbKeyObject, ULONG cbKeyObject, PCHAR pbInput, ULONG
cbInput, ULONG dwFlags);
```

The `BCryptImportKey()` function imports a symmetric key from a key blob.

`hAlgorithm [in]` is the handle of the algorithm provider to import the key. This handle is obtained by calling the [BCryptOpenAlgorithmProvider](#) function.

`hImportKey [in, out]` is not currently used and should be `NULL`.

`pszBlobType [in]` is a null-terminated Unicode string that contains an identifier that specifies the type of BLOB that is contained in the `pbInput` buffer. `pszBlobType` can be one of `BCRYPT_KEY_DATA_BLOB` and `BCRYPT_OPAQUE_KEY_BLOB`.

`phKey [out]` is a pointer to a `BCRYPT_KEY_HANDLE` that receives the handle of the imported key that is used in subsequent functions that require a key, such as [BCryptEncrypt](#). This handle must be released when it is no longer needed by passing it to the [BCryptDestroyKey](#) function.

`pbKeyObject [out]` is a pointer to a buffer that receives the imported key object. The `cbKeyObject` parameter contains the size of this buffer. The required size of this buffer can be obtained by calling the [BCryptGetProperty](#) function to get the `BCRYPT_OBJECT_LENGTH` property. This will provide the size of the key object for the specified algorithm. This memory can only be freed after the `phKey` key handle is destroyed.

`cbKeyObject [in]` is the size, in bytes, of the `pbKeyObject` buffer.

`pbInput [in]` is the address of a buffer that contains the key BLOB to import. The `cbInput` parameter contains the size of this buffer.

The `pszBlobType` parameter specifies the type of key BLOB this buffer contains.

`cbInput [in]` is the size, in bytes, of the `pbInput` buffer.

`dwFlags [in]` is a set of flags that modify the behavior of this function. No flags are currently defined, so this parameter should be zero.

5.4.2 BCryptImportKeyPair

```
NTSTATUS WINAPI BCryptImportKeyPair( BCRYPT_ALG_HANDLE hAlgorithm, BCRYPT_KEY_HANDLE hImportKey, LPCWSTR
pszBlobType, BCRYPT_KEY_HANDLE *phKey, PCHAR pbInput, ULONG cbInput, ULONG dwFlags);
```

The `BCryptImportKeyPair()` function is used to import a public/private key pair from a key blob.

`hAlgorithm [in]` is the handle of the algorithm provider to import the key. This handle is obtained by calling the [BCryptOpenAlgorithmProvider](#) function.

hImportKey [in, out] is not currently used and should be NULL.

pszBlobType [in] is a null-terminated Unicode string that contains an identifier that specifies the type of BLOB that is contained in the pbInput buffer. This can be one of the following values: BCRYPT_DH_PRIVATE_BLOB, BCRYPT_DH_PUBLIC_BLOB, BCRYPT_DSA_PRIVATE_BLOB, BCRYPT_DSA_PUBLIC_BLOB, BCRYPT_PUBLIC_KEY_BLOB, BCRYPT_PRIVATE_KEY_BLOB, BCRYPT_RSAPRIVATE_BLOB, BCRYPT_RSAPUBLIC_BLOB, LEGACY_DH_PUBLIC_BLOB, LEGACY_DH_PRIVATE_BLOB, LEGACY_DSA_PRIVATE_BLOB, LEGACY_DSA_PUBLIC_BLOB, LEGACY_DSA_V2_PRIVATE_BLOB, LEGACY_RSAPRIVATE_BLOB, LEGACY_RSAPUBLIC_BLOB.

phKey [out] is a pointer to a BCRYPT_KEY_HANDLE that receives the handle of the imported key. This handle is used in subsequent functions that require a key, such as BCryptSignHash. This handle must be released when it is no longer needed by passing it to the BCryptDestroyKey function.

pbInput [in] is the address of a buffer that contains the key BLOB to import. The cbInput parameter contains the size of this buffer. The pszBlobType parameter specifies the type of key BLOB this buffer contains.

cbInput [in] contains the size, in bytes, of the pbInput buffer.

dwFlags [in] is a set of flags that modify the behavior of this function. This can be zero or the following value: BCRYPT_NO_KEY_VALIDATION.

5.4.3 BCryptExportKey

```
NTSTATUS WINAPI BCryptExportKey( BCRYPT_KEY_HANDLE hKey, BCRYPT_KEY_HANDLE hExportKey, LPCWSTR
pszBlobType, PCHAR pbOutput, ULONG cbOutput, ULONG *pcbResult, ULONG dwFlags);
```

The BCryptExportKey() function exports a key to a memory blob that can be persisted for later use.

hKey [in] is the handle of the key to export.

hExportKey [in, out] is not currently used and should be set to NULL.

pszBlobType [in] is a null-terminated Unicode string that contains an identifier that specifies the type of BLOB to export. This can be one of the following values: BCRYPT_DH_PRIVATE_BLOB, BCRYPT_DH_PUBLIC_BLOB, BCRYPT_DSA_PRIVATE_BLOB, BCRYPT_DSA_PUBLIC_BLOB, BCRYPT_ECCPRIVATE_BLOB, BCRYPT_ECCPUBLIC_BLOB, BCRYPT_KEY_DATA_BLOB, BCRYPT_OPAQUE_KEY_BLOB, BCRYPT_PUBLIC_KEY_BLOB, BCRYPT_PRIVATE_KEY_BLOB, BCRYPT_RSAPRIVATE_BLOB, BCRYPT_RSAPUBLIC_BLOB, LEGACY_DH_PRIVATE_BLOB, LEGACY_DH_PUBLIC_BLOB, LEGACY_DSA_PRIVATE_BLOB, LEGACY_DSA_PUBLIC_BLOB, LEGACY_DSA_V2_PRIVATE_BLOB, LEGACY_RSAPRIVATE_BLOB, LEGACY_RSAPUBLIC_BLOB.

pbOutput is the address of a buffer that receives the key BLOB. The cbOutput parameter contains the size of this buffer. If this parameter is NULL, this function will place the required size, in bytes, in the

ULONG pointed to by the pcbResult parameter.

cbOutput [in] contains the size, in bytes, of the pbOutput buffer.

pcbResult [out] is a pointer to a ULONG that receives the number of bytes that were copied to the pbOutput buffer. If the pbOutput parameter is NULL, this function will place the required size, in bytes, in the ULONG pointed to by this parameter.

dwFlags [in] is a set of flags that modify the behavior of this function. No flags are defined for this function.

5.5 Encryption and Decryption

5.5.1 BCryptEncrypt

```
NTSTATUS WINAPI BCryptEncrypt( BCRYPT_KEY_HANDLE hKey, PCHAR pbInput, ULONG cbInput, VOID *pPaddingInfo,
PCHAR pbIV, ULONG cbIV, PCHAR pbOutput, ULONG cbOutput, ULONG *pcbResult, ULONG dwFlags);
```

The BCryptEncrypt() function encrypts a block of data of given length.

hKey [in, out] is the handle of the key to use to encrypt the data. This handle is obtained from one of the key creation functions, such as BCryptGenerateSymmetricKey, BCryptGenerateKeyPair, or BCryptImportKey.

pbInput [in] is the address of a buffer that contains the plaintext to be encrypted. The cbInput parameter contains the size of the plaintext to encrypt. For more information, see Remarks.

cbInput [in] is the number of bytes in the pbInput buffer to encrypt.

pPaddingInfo [in, optional] is a pointer to a structure that contains padding information. The actual type of structure this parameter points to depends on the value of the dwFlags parameter. This parameter is only used with asymmetric keys and must be NULL otherwise.

pbIV [in, out, optional] is the address of a buffer that contains the initialization vector (IV) to use during encryption. The cbIV parameter contains the size of this buffer. This function will modify the contents of this buffer. If you need to reuse the IV later, make sure you make a copy of this buffer before calling this function. This parameter is optional and can be NULL if no IV is used. The required size of the IV can be obtained by calling the BCryptGetProperty function to get the BCRYPT_BLOCK_LENGTH property. This will provide the size of a block for the algorithm, which is also the size of the IV.

cbIV [in] contains the size, in bytes, of the pbIV buffer.

pbOutput [out, optional] is the address of a buffer that will receive the ciphertext produced by this function. The cbOutput parameter contains the size of this buffer. For more information, see Remarks. If this parameter is NULL, this function will calculate the size needed for the ciphertext and return the size in the location pointed to by the pcbResult parameter.

cbOutput [in] contains the size, in bytes, of the pbOutput buffer. This parameter is ignored if the pbOutput parameter is NULL.

pcbResult [out] is a pointer to a ULONG variable that receives the number of bytes copied to the pbOutput buffer. If pbOutput is NULL, this receives the size, in bytes, required for the ciphertext. dwFlags [in] is a set of flags that modify the behavior of this function. The allowed set of flags depends on the type of key specified by the hKey parameter. If the key is a symmetric key, this can be zero or the following value: BCRYPT_BLOCK_PADDING. If the key is an asymmetric key, this can be one of the following values: BCRYPT_PAD_NONE, BCRYPT_PAD_OAEP, BCRYPT_PAD_PKCS1.

5.5.2 BCryptDecrypt

```
NTSTATUS WINAPI BCryptDecrypt( BCRYPT_KEY_HANDLE hKey, PCHAR pbInput, ULONG cbInput, VOID *pPaddingInfo,
PCHAR pbIV, ULONG cbIV, PCHAR pbOutput, ULONG cbOutput, ULONG *pcbResult, ULONG dwFlags);
```

The BCryptDecrypt() function decrypts a block of data of given length.

hKey [in, out] is the handle of the key to use to decrypt the data. This handle is obtained from one of the key creation functions, such as BCryptGenerateSymmetricKey, BCryptGenerateKeyPair, or BCryptImportKey.

pbInput [in] is the address of a buffer that contains the ciphertext to be decrypted. The cbInput parameter contains the size of the ciphertext to decrypt. For more information, see Remarks. cbInput [in] is the number of bytes in the pbInput buffer to decrypt.

pPaddingInfo [in, optional] is a pointer to a structure that contains padding information. The actual type of structure this parameter points to depends on the value of the dwFlags parameter. This parameter is only used with asymmetric keys and must be NULL otherwise.

pbIV [in, out, optional] is the address of a buffer that contains the initialization vector (IV) to use during decryption. The cbIV parameter contains the size of this buffer. This function will modify the contents of this buffer. If you need to reuse the IV later, make sure you make a copy of this buffer before calling this function. This parameter is optional and can be NULL if no IV is used. The required size of the IV can be obtained by calling the BCryptGetProperty function to get the BCRYPT_BLOCK_LENGTH property. This will provide the size of a block for the algorithm, which is also the size of the IV.

cbIV [in] contains the size, in bytes, of the pbIV buffer.

pbOutput [out, optional] is the address of a buffer to receive the plaintext produced by this function. The cbOutput parameter contains the size of this buffer. For more information, see Remarks.

If this parameter is NULL, this function will calculate the size required for the plaintext and return the size in the location pointed to by the pcbResult parameter.

cbOutput [in] is the size, in bytes, of the pbOutput buffer. This parameter is ignored if the pbOutput parameter is NULL.

pcbResult [out] is a pointer to a ULONG variable to receive the number of bytes copied to the pbOutput buffer. If pbOutput is NULL, this receives the size, in bytes, required for the plaintext.

dwFlags [in] is a set of flags that modify the behavior of this function. The allowed set of flags depends on the type of key specified by the hKey parameter. If the key is a symmetric key, this can be zero or the following value: BCRYPT_BLOCK_PADDING. If the key is an asymmetric key, this can be one of the following values: BCRYPT_PAD_NONE, BCRYPT_PAD_OAEP, BCRYPT_PAD_PKCS1.

5.6 Hashing and HMAC

5.6.1 BCryptCreateHash

```
NTSTATUS WINAPI BCryptCreateHash( BCRYPT_ALG_HANDLE hAlgorithm, BCRYPT_HASH_HANDLE *phHash, PCHAR pbHashObject, ULONG cbHashObject, PCHAR pbSecret, ULONG cbSecret, ULONG dwFlags);
```

The BCryptCreateHash() function creates a hash object with an optional key. The optional key is used for HMAC type keyed-hash functions.

hAlgorithm [in, out] is the handle of an algorithm provider created by using the BCryptOpenAlgorithmProvider function. The algorithm that was specified when the provider was created must support the hash interface.

phHash [out] is a pointer to a BCRYPT_HASH_HANDLE value that receives a handle that represents the hash object. This handle is used in subsequent hashing functions, such as the BCryptHashData function. When you have finished using this handle, release it by passing it to the BCryptDestroyHash function. pbHashObject [out] is a pointer to a buffer that receives the hash object. The cbHashObject parameter contains the size of this buffer. The required size of this buffer can be obtained by calling the BCryptGetProperty function to get the BCRYPT_OBJECT_LENGTH property. This will provide the size of the hash object for the specified algorithm. This memory can only be freed after the hash handle is destroyed.

cbHashObject [in] contains the size, in bytes, of the pbHashObject buffer.

pbSecret [in, optional] is a pointer to a buffer that contains the key to use for the hash. The cbSecret parameter contains the size of this buffer. If no key should be used with the hash, set this parameter to NULL. This key only applies to keyed hash algorithms, like Hash-Based Message Authentication Code (HMAC).

cbSecret [in, optional] contains the size, in bytes, of the pbSecret buffer. If no key should be used with the hash, set this parameter to zero.

dwFlags [in] is not currently used and must be zero.

5.6.2 BCryptHashData

```
NTSTATUS WINAPI BCryptHashData( BCRYPT_HASH_HANDLE hHash, PCHAR pbInput, ULONG cbInput, ULONG dwFlags);
```

The BCryptHashData() function performs a one way hash on a data buffer. Call the BCryptFinishHash() function to finalize the hashing operation to get the hash result.

5.6.3 BCryptDuplicateHash

```
NTSTATUS WINAPI BCryptDuplicateHash( BCRYPT_HASH_HANDLE hHash, BCRYPT_HASH_HANDLE *phNewHash, PCHAR pbHashObject, ULONG cbHashObject, ULONG dwFlags);
```

The BCryptDuplicateHash() function duplicates an existing hash object. The duplicate hash object contains all state and data that was hashed to the point of duplication.

5.6.4 BCryptFinishHash

NTSTATUS WINAPI BCryptFinishHash(BCRYPT_HASH_HANDLE hHash, PCHAR pbOutput, ULONG cbOutput, ULONG dwFlags);

The BCryptFinishHash() function retrieves the hash value for the data accumulated from prior calls to BCryptHashData() function.

5.6.5 BCryptDestroyHash

NTSTATUS WINAPI BCryptDestroyHash(BCRYPT_HASH_HANDLE hHash);

The BCryptDestroyHash() function destroys a hash object.

5.7 Signing and Verification

5.7.1 BCryptSignHash

NTSTATUS WINAPI BCryptSignHash(BCRYPT_KEY_HANDLE hKey, VOID *pPaddingInfo, PCHAR pbInput, ULONG cbInput, PCHAR pbOutput, ULONG cbOutput, ULONG *pcbResult, ULONG dwFlags);

The BCryptSignHash() function creates a signature of a hash value.

hKey [in] is the handle of the key to use to sign the hash.

pPaddingInfo [in, optional] is a pointer to a structure that contains padding information. The actual type of structure this parameter points to depends on the value of the dwFlags parameter. This parameter is only used with asymmetric keys and must be NULL otherwise.

pbInput [in] is a pointer to a buffer that contains the hash value to sign. The cbInput parameter contains the size of this buffer.

cbInput [in] is the number of bytes in the pbInput buffer to sign.

pbOutput [out] is the address of a buffer to receive the signature produced by this function. The cbOutput parameter contains the size of this buffer. If this parameter is NULL, this function will calculate the size required for the signature and return the size in the location pointed to by the pcbResult parameter.

cbOutput [in] is the size, in bytes, of the pbOutput buffer. This parameter is ignored if the pbOutput parameter is NULL.

pcbResult [out] is a pointer to a ULONG variable that receives the number of bytes copied to the pbOutput buffer. If pbOutput is NULL, this receives the size, in bytes, required for the signature. dwFlags [in] is a set of flags that modify the behavior of this function. The allowed set of flags depends on the type of key specified by the hKey parameter. If the key is a symmetric key, this parameter is not used and should be set to zero. If the key is an asymmetric key, this can be one of the following values: BCRYPT_PAD_PKCS1, BCRYPT_PAD_PSS.

Note: According to SP 800-131, SHA-1 hash signing should no longer be used, and is disallowed as of 12/2013. This is for legacy use only for signature verification.

5.7.2 BCryptVerifySignature

NTSTATUS WINAPI BCryptVerifySignature(BCRYPT_KEY_HANDLE hKey, VOID *pPaddingInfo, PCHAR pbHash, ULONG cbHash, PCHAR pbSignature, ULONG cbSignature, ULONG dwFlags);

The BCryptVerifySignature() function verifies that the specified signature matches the specified hash.

hKey [in] is the handle of the key to use to decrypt the signature. This must be an identical key or the public key portion of the key pair used to sign the data with the [BCryptSignHash](#) function.

pPaddingInfo [in, optional] is a pointer to a structure that contains padding information. The actual type of structure this parameter points to depends on the value of the dwFlags parameter. This parameter is only used with asymmetric keys and must be NULL otherwise.

pbHash [in] is the address of a buffer that contains the hash of the data. The cbHash parameter contains the size of this buffer.

cbHash [in] is the size, in bytes, of the pbHash buffer.

pbSignature [in] is the address of a buffer that contains the signed hash of the data. The BCryptSignHash function is used to create the signature. The cbSignature parameter contains the size of this buffer.

cbSignature [in] is the size, in bytes, of the pbSignature buffer. The BCryptSignHash function is used to create the signature.

Note: According to SP 800-131, SHA-1 hash signing should no longer be used, and is disallowed as of 12/2013. This is for legacy use only for signature verification.

5.8 Secret Agreement and Key Derivation

5.8.1 BCryptSecretAgreement

```
NTSTATUS WINAPI BCryptSecretAgreement( BCRYPT_KEY_HANDLE hPrivKey, BCRYPT_KEY_HANDLE hPubKey,
BCRYPT_SECRET_HANDLE *pHAgreedSecret, ULONG dwFlags);
```

The BCryptSecretAgreement() function creates a secret agreement value from a private and a public key. This function is used with Diffie-Hellman (DH) and Elliptic Curve Diffie-Hellman (ECDH) algorithms. hPrivKey [in] The handle of the private key to use to create the secret agreement value.

hPubKey [in] The handle of the public key to use to create the secret agreement value.

phSecret [out] A pointer to a BCRYPT_SECRET_HANDLE that receives a handle that represents the secret agreement value. This handle must be released by passing it to the BCryptDestroySecret function when it is no longer needed.

dwFlags [in] A set of flags that modify the behavior of this function. This can be zero or the following value: KDF_USE_SECRET_AS_HMAC_KEY_FLAG.

5.8.2 BCryptDeriveKey

```
NTSTATUS WINAPI BCryptDeriveKey( BCRYPT_SECRET_HANDLE hSharedSecret, LPCWSTR pwszKDF, BCryptBufferDesc
*pParameterList, PCHAR pbDerivedKey, ULONG cbDerivedKey, ULONG *pcbResult, ULONG dwFlags);
```

The BCryptDeriveKey() function derives a key from a secret agreement value.

hSharedSecret [in, optional] is the secret agreement handle to create the key from. This handle is obtained from the BCryptSecretAgreement function.

pwszKDF [in] is a pointer to a null-terminated Unicode string that contains an object identifier (OID) that identifies the key derivation function (KDF) to use to derive the key. This can be one of the following strings: BCRYPT_KDF_HASH (parameters in pParameterList: KDF_HASH_ALGORITHM, KDF_SECRET_PREPEND, KDF_SECRET_APPEND), BCRYPT_KDF_HMAC (parameters in pParameterList: KDF_HASH_ALGORITHM, KDF_HMAC_KEY, KDF_SECRET_PREPEND, KDF_SECRET_APPEND), BCRYPT_KDF_TLS_PRF (parameters in pParameterList: KDF_TLS_PRF_LABEL, KDF_TLS_PRF_SEED). pParameterList [in, optional] is the address of a BCryptBufferDesc structure that contains the KDF parameters. This parameter is optional and can be NULL if it is not needed.

pbDerivedKey [out, optional] is the address of a buffer that receives the key. The cbDerivedKey parameter contains the size of this buffer. If this parameter is NULL, this function will place the required size, in bytes, in the ULONG pointed to by the pcbResult parameter.

cbDerivedKey [in] contains the size, in bytes, of the pbDerivedKey buffer.

pcbResult [out] is a pointer to a ULONG that receives the number of bytes that were copied to the pbDerivedKey buffer. If the pbDerivedKey parameter is NULL, this function will place the required size, in bytes, in the ULONG pointed to by this parameter.

dwFlags [in] is a set of flags that modify the behavior of this function. This can be zero or the following value.

5.8.3 BCryptDestroySecret

```
NTSTATUS WINAPI BCryptDestroySecret( BCRYPT_SECRET_HANDLE hSecret);
```

The BCryptDestroySecret() function destroys a secret agreement handle that was created by using the BCryptSecretAgreement() function.

5.9 Configuration

These are not cryptographic functions. They are used to configure cryptographic providers on the system, and are provided for informational purposes. Please see <http://msdn.microsoft.com> for details.

Function Name	Description
BCryptAddContextFunction	Adds a function (algorithm or cipher-suite) to a context function list.
BCryptAddContextFunctionProvider	Adds a provider to a context function provider list.
BCryptConfigureContext	Configures a context.
BCryptConfigureContextFunction	Configures a context function.
BCryptCreateContext	Creates a new configuration context.
BCryptDeleteContext	Deletes a configuration context.
BCryptEnumAlgorithms	Enumerates the algorithms for a given set of operations.
BCryptEnumContextFunctionProviders	Enumerates the providers in a context function provider list.
BCryptEnumContextFunctions	Enumerates the functions (algorithms or suites) in a context function list.
BCryptEnumContexts	Enumerates the configuration contexts in the specified table.
BCryptEnumProviders	Returns a list of providers for a given algorithm.
BCryptEnumRegisteredProviders	Enumerates the providers currently registered on the local machine.
BCryptQueryContextConfiguration	Queries the current configuration of a context.
BCryptQueryContextFunctionConfiguration	Queries the current configuration of a context function.
BCryptQueryContextFunctionProperty	Queries the current value of a context function property.
BCryptQueryProviderRegistration	Retrieves registration information for a provider.
BCryptRegisterConfigChangeNotify	This API differs slightly between User-Mode and Kernel- Mode.
BCryptRegisterProvider	Registers a provider for usage on the local machine.
BCryptRemoveContextFunction	Removes a function (algorithm or cipher-suite) from a context function list.
BCryptRemoveContextFunctionProvider	Removes a provider from a context function provider list.
BCryptResolveProviders	This is the main API in Crypto configuration. It resolves queries against the set of providers currently registered on the local system and the configuration information specified in the machine and domain configuration tables, returning an ordered list of references to one or more providers matching the specified criteria.
BCryptSetContextFunctionProperty	Creates, modifies, or deletes a context function property.
BCryptUnregisterConfigChangeNotify	Unregisters Config Change notification request.
BCryptUnregisterProvider	Removes provider registration information from the local machine.
BCryptGetFipsAlgorithmMode	Retrieve whether the FIPS algorithm mode is enabled or not.

6 Operational Environment

BCRYPT.DLL is intended to run on Windows Embedded Compact 7 in Single User mode, on the hardware as defined in Section 2, and is tested on the below operational environments. When run in these configurations, multiple concurrent operators are not supported.

- Windows Embedded Compact 7 running on a Sigma Designs Vantage 8654 Development Kit with a Sigma Designs SMP8654 (MIPSII_FP) CPU
- Windows Embedded Compact 7 running on a Sigma Designs Vantage 8654 Development Kit with a Sigma Designs SMP8654 (MIPSII) CPU
- Windows Embedded Compact 7 running on a TI OMAP TMDSEVM3530 with Texas Instruments EVM3530 CPU
- Windows Embedded Compact 7 running on a Samsung SMDK6410 Development Kit with Samsung SMDK6410 CPU
- Windows Embedded Compact 7 running on a Freescale i.MX27 Development Kit with Freescale i.MX27 CPU
- Windows Embedded Compact 7 running on an eBox-330-A with MSTI PDX-600 CPU

BCRYPT.DLL is also compliant on platforms that are not listed above. Please see FIPS PUB 140-2 Implementation Guidance G.5 for more details on portability rules and requirements.

Because BCRYPT.DLL module is a DLL, each process requesting access is provided its own instance of the module. As such, each process has full access to all information and keys within the module. Note that no keys or other information are maintained upon detachment from the DLL, thus an instantiation of the module will only contain keys or information that the process has placed in the module.

7 Cryptographic Key Management

BCRYPT.DLL crypto module manages keys in the following manner.

7.1 Cryptographic Keys, CSPs, and SRDIs

The BCRYPT.DLL crypto module contains the following security relevant data items:

Security Relevant Data	Item SRDI Description
Symmetric encryption/decryption keys	Keys used for AES or TDES encryption/decryption.
HMAC keys	Keys used for HMAC-SHA1, HMAC-SHA256, HMAC-SHA384, and HMAC-SHA512
DSA Public Keys	Keys used for the verification of DSA digital signatures
DSA Private Keys	Keys used for the calculation of DSA digital signatures
ECDSA Public Keys	Keys used for the verification of ECDSA digital signatures
ECDSA Private Keys	Keys used for the calculation of ECDSA digital signatures
RSA Public Keys	Keys used for the verification of RSA digital signatures
RSA Private Keys	Keys used for the calculation of RSA digital signatures
DH Public and Private values	Public and private values used for Diffie-Hellman key establishment.

ECDH Public and Private values	Public and private values used for EC Diffie-Hellman key establishment.
DRBG Parameters	DRBG Seed, Entropy, Key and State value 'V'

*The module generates cryptographic keys whose strengths are modified by available entropy.

7.2 Access Control Policy

The BCRYPT.DLL crypto module allows controlled access to the SRDIs contained within it. The following table defines the access that a service has to each. The permissions are categorized as a set of four separate permissions: read (r), write (w), execute (x), delete (d). If no permission is listed, the service has no access to the SRDI.

BCRYPT.DLL crypto module SRDI/Service Access Policy	Security Relevant Data Item	Symmetric Keys	HMAC keys	DSA Public Keys	DSA Private Keys	ECDSA public keys	ECDSA Private keys	RSA Public Keys	RSA Private Keys	DH Public and Private values	ECDH Public and Private values	DRBG Parameters
	Service Categories											
Cryptographic Module Power Up and Power Down								r/x				
Key Formatting		w										
Random Number Generation (DRBG)		x										r,w,x
Data Encryption and Decryption		x										
Hashing			x/w									
Acquiring a Table of Pointers to BCryptXXX Functions												
Algorithm Providers and Properties												
Key and Key-Pair Generation		w/d	w/d	w/d	w/d	w/d	w/d	w/d	w/d	w/d	w/d	
Key Entry and Output		r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	r/w	
Signing and Verification				x	x	x	x	X	x			
Secret Agreement and Key Derivation										x	x	

7.3 Key Material

Each time an application links with BCRYPT.DLL, the DLL is instantiated and no keys exist within it. The user application is responsible for importing keys into BCRYPT.DLL or using BCRYPT.DLL's functions to generate keys.

7.4 Key Generation

BCRYPT.DLL can create and use keys for the following algorithms: RSA, DSA, DH, ECDH, ECDSA, RC2, RC4, DES, Triple-DES, AES, and HMAC (RC2, RC4 and DES may not be used in FIPS mode).

Random keys can be generated by calling the `BCryptGenerateSymmetricKey()` and `BCryptGenerateKeyPair()` functions. Random data generated by the `BCryptGenRandom()` function is provided to `BCryptGenerateSymmetricKey()` function to generate symmetric keys. DES, Triple-DES, AES, ECDSA, DSA, DH, and ECDH keys and key-pairs are generated following the techniques given in FIPS PUB 186-2, Appendix 3, Random Number Generation. RSA key-pairs are generated per ANSIX9.31.

The BCRYPT module generates cryptographic keys whose strengths are modified by available entropy.

7.5 Key Establishment

BCRYPT.DLL can use FIPS approved Diffie-Hellman key agreement (DH), Elliptic Curve Diffie-Hellman key agreement (ECDH), and manual methods to establish keys.

BCRYPT.DLL can use the following FIPS non-approved but allowed key derivation functions (KDF) from the common secret that is established during the execution of DH and ECDH key agreement algorithms:

- BCRYPT_KDF_HASH. This KDF supports FIPS SP800-56A (Section 5.8), X9.63, and X9.42 key derivation.
- BCRYPT_KDF_HMAC. This KDF supports FIPS IPsec IKE v1 key derivation as specified in FIPS 140-2 Implementation Guidance.
- BCRYPT_KDF_TLS_PR. This KDF supports FIPS SSLv3.1 and TLS v1.0 key derivation as specified in FIPS 140-2 Implementation Guidance.

7.6 Key Entry and Output

Keys can be both exported and imported out of and into BCRYPT.DLL via `BCryptExportKey()`, `BCryptImportKey()`, and `BCryptImportKeyPair()` functions.

Symmetric key entry and output can also be done by exchanging keys using the recipient's asymmetric public key via `BCryptSecretAgreement()` and `BCryptDeriveKey()` functions.

Exporting the RSA private key by supplying a blob type of `BCRYPT_PRIVATE_KEY_BLOB`, `BCRYPT_RSAFULLPRIVATE_BLOB`, or `BCRYPT_RSAPRIVATE_BLOB` to `BCryptExportKey()` is not allowed in FIPS mode.

7.7 Key Storage

BCRYPT.DLL does not provide persistent storage of keys.

7.8 Key Archival

BCRYPT.DLL does not directly archive cryptographic keys. The Authenticated User may choose to export a cryptographic key (cf. "Key Entry and Output" above), but management of the secure archival of that key is the responsibility of the user.

7.9 Key Zeroization

All keys are destroyed and their memory location zeroized when the User calls `BCryptDestroyKey()` or `BCryptDestroySecret()` on that key handle.

8 Self-Tests

BCRYPT.DLL performs the following power-on (start up) self-tests when `DllMain` is called by the operating system.

- SHA-1 hash Known Answer Test
- HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-384, and HMAC-SHA-512 Known Answer Test
- Triple-DES encrypt/decrypt ECB Known Answer Test

- Triple-DES encrypt/decrypt CBC Known Answer Test
- AES-128, AES-192, AES-256 encrypt/decrypt ECB Known Answer Test
- AES-128, AES-192, AES-256 encrypt/decrypt CBC Known Answer Test
- DSA sign/verify test
- RSA sign and verify Known Answer Test
- DH secret agreement Known Answer Test
- ECDSA sign/verify test
- ECDH secret agreement Known Answer Test
- SP 800-90 DRBG Known Answer Test and Health Checks
- Powerup Integrity Test (RSA Signature Verification)

BCRYPT.DLL performs pair-wise consistency checks upon each invocation of RSA, ECDH, DSA, and ECDSA key-pair generation and import as defined in FIPS 140-2. BCRYPT.DLL also performs a continuous RNG test on each of the implemented RNGs as defined in FIPS 140-2.

In all cases for any failure of a power-on (start up) self-test, BCRYPT.DLL DllMain fails to return the STATUS_SUCCESS status to the operating system. The only way to recover from the failure of a power-on (start up) self-test is to attempt to reload the BCRYPT.DLL, which will rerun the self-tests, and will only succeed if the self-tests passes.

9 Design Assurance

The BCRYPT.DLL crypto module is part of the overall Windows Embedded Compact 7 operating system, which is a product family that has gone through and is continuously going through the Common Criteria Certification or equivalent under US NIAP CCEVS since Windows NT 3.5. The certification provides the necessary design assurance.

The BCRYPT.DLL is installed and started as part of the Windows Embedded Compact 7 operating system.

10 Additional details

For the latest information on Windows Embedded Compact 7, check out the Microsoft web site at <http://www.microsoft.com>.

CHANGE HISTORY			
AUTHOR	DATE	VERSION	COMMENT
Tolga Acar	6/7/2007	1.0	Windows Vista FIPS Approval Submission Version
Kevin Michelizzi	2/17/2012	1.1	Windows Embedded Compact 7 Version
Kevin Michelizzi	3/22/2012	1.2	Windows Embedded Compact 7 FIPS Approval Review
Kevin Michelizzi	7/18/2012	1.3	Windows Embedded Compact 7 HMAC and algorithm corrections
Kevin Michelizzi	10/30/2012	1.4	Update with final comments from review
Kevin Michelizzi	07/03/2013	1.5	Update with comments from CMVP
Kevin Michelizzi	07/18/2013	1.6	Add entropy caveat on key generation

